


American Autowire has high quality crimp tools for your project !



Single wire crimp tool. Used for smaller gauge terminals.  
p/n **500518**.....\$45



Double crimp tool. Used for larger gauge terminals and double wire crimps.  
p/n **500523**.....\$89.95

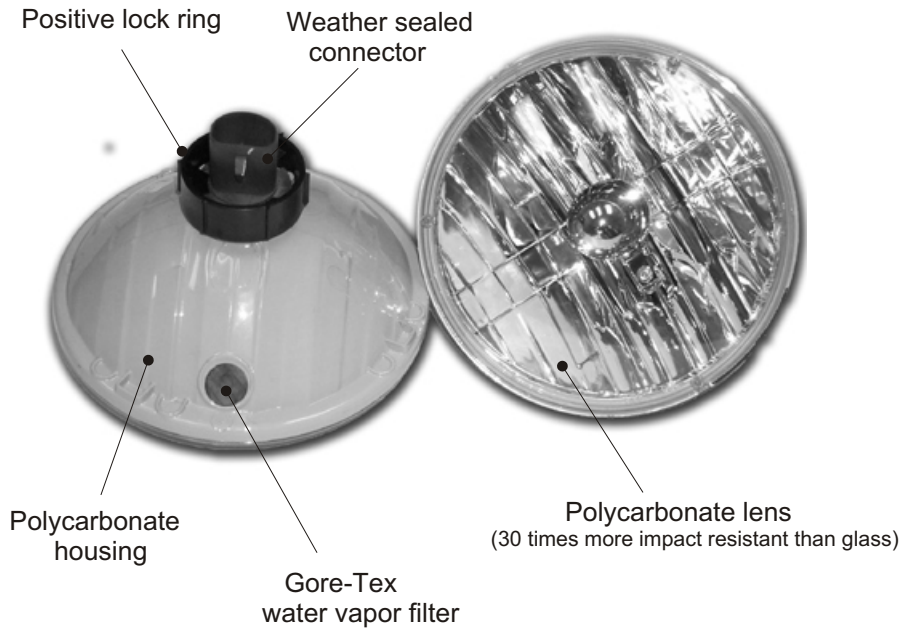

.8 pounds lighter than a stock headlight bulb !

DOT approved !



We Make Wiring Easy!!  
856-933-9301

1957 Chevy  
**HALOGEN**  
HEADLIGHT KIT

**500642**

92965601 instruction rev 2. 11/22/050

## INSTALLATION INSTRUCTIONS

This kit is designed to be installed in a 1957 Chevrolet which has the OEM style wiring existing in the vehicle.

- 1- Remove existing headlight bezel, retaining ring, and bulb. Disconnect headlight connector, and remove existing bucket harness.




- 2- Install original bulb housing on back on new halogen bulb. (Be sure that the housing is properly positioned on bulb.)



- 3- Route new harness through the hole in headlight bucket, and secure with attached grommet. Connect black ground wire to housing hole, as shown. Plug harness into sheet metal, as shown in the diagram to the right, and plug in original front light harness connector.



Original mating connectors and terminals are supplied for use in custom applications such as the American Autowire 500434 Classic Update Series kit for the 1957 Chevrolet.

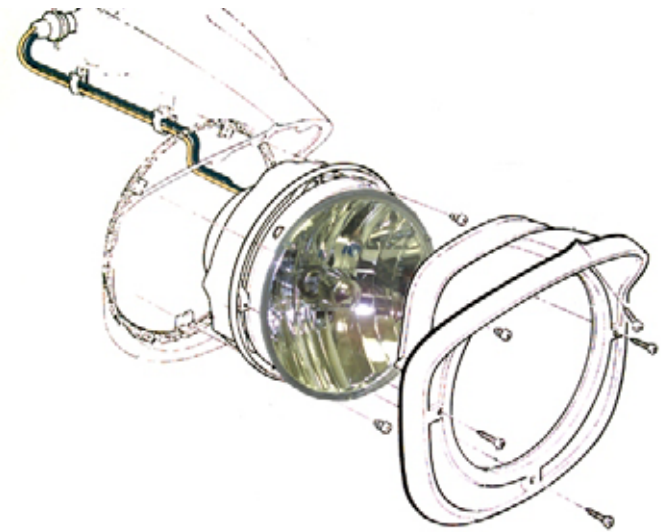

- 4- Install protective pad, as shown. Plug in halogen headlight assembly. Install trim ring, etc., and installation is complete.