


Classic Update Series



(12 volt "Battery" only used with LED tail lamp or optional trunk lamp)

Plug into connector "B" and maintain continuity with dash harness

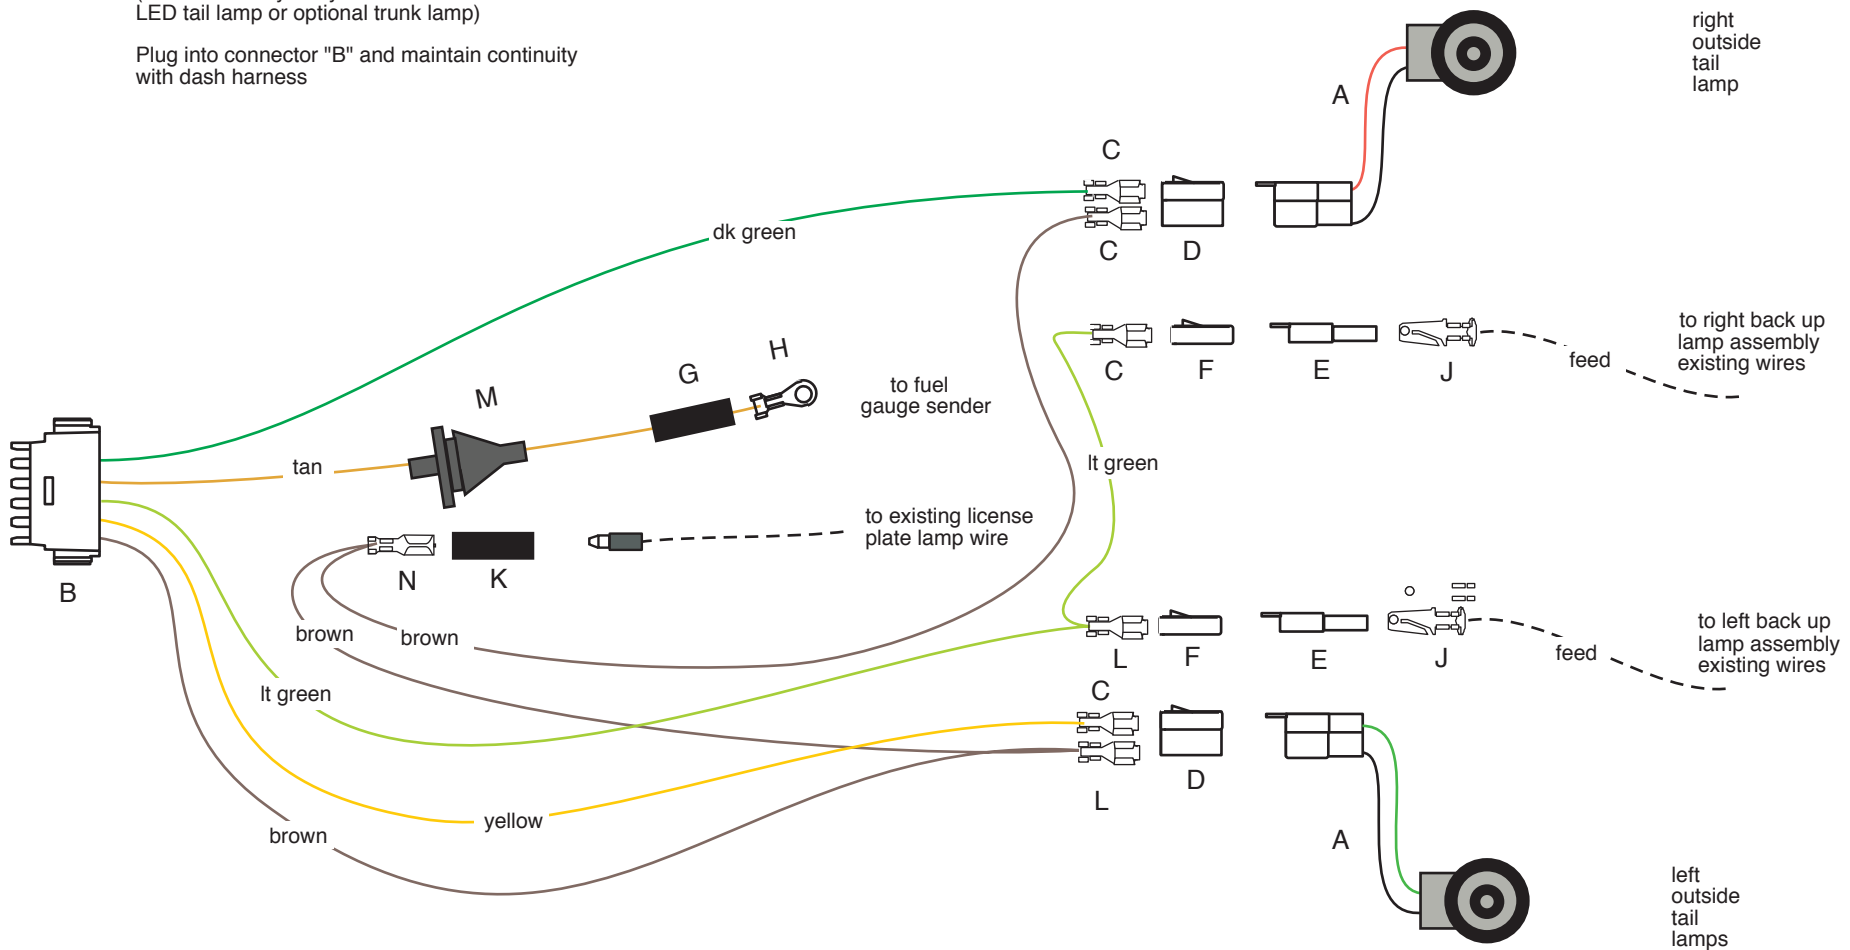

(Third brake light - only used when needed)

Plug into connector "B" and maintain continuity with dash harness



**American
Autowire**

American Autowire
800-482-9473

Classic Update Series
1964-66
Mustang Fastback


bag
M

REAR BODY KIT


510129

92969237 instruction rev 0.0 9/8/2009

USE THIS SHEET FOR ALL 1964-66 MUSTANG FASTBACK OR COUPE CARS

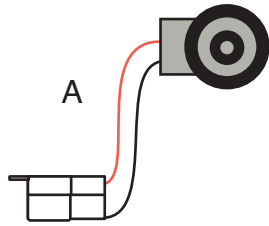

NOTE: You have been provided with pigtails A to complete your Tail lamp connections. The orange/blue with black pigtail is your RH extension, and your green/orange with black is your LH extension. You have also been provided terminals J and connectors E to install onto your factory backup lamps to complete those connections.



Brown	Tail Lamps	Route this wire to the LH tail lamp, cut to length, take the cut off portion, double them together in terminal L and install into connector D as shown on sheet 1. Route the remaining wire to the license lamp, cut to length, take the cut off portion, double them together in terminal N and install into sleeve K as shown on sheet 1. Route remaining wire to the RH tail lamp, cut to length, crimp on terminal C and install into connector D as shown on sheet 1.
Yellow	LH Stop / Turn	Route this wire to the LH tail lamp, cut to length, crimp on terminal C and install into connector D as shown on sheet 1.
Dk. Green	RH Stop / Turn	Route this wire to the RH tail lamp, cut to length, crimp on terminal C and install into connector D as shown on sheet 1.
Lt. Green	Backup Lamp Feed	Route this wire to the LH backup lamp, cut to length, take the cut off portion, double them together in terminal L and install into connector F as shown on sheet 1. Route remaining wire to the RH backup lamp, cut to length, crimp on terminal C and install into connector F as shown on sheet 1.
Lt. Blue	Third Brake Lamp	If you are using this option, install this wire into connector B maintaining color continuity with the main dash harness connection. Route the other end to your third brake lamp and install as directed by the manufacturer.
Orange	12V Battery Fused	This wire can be used as a trunk lamp lead wire or 12V battery fused feed if using LED tail lamps. Install this wire into connector B maintaining color continuity with the main dash harness connection. Route the other end to your trunk area and install as directed by the manufacturer.
Tan	Fuel Tank Lead	Route this wire through grommet M, down through the trunk floor to the fuel tank sender, cut to length, slide on sleeve G. and crimp on terminal H. Once completed, slide sleeve back up and over the crimped area. Install completed wire onto fuel tank sender to complete this circuit.