



Classic Update Series

(All except Camaro Deluxe Interior)

(Camaro Deluxe Interior)

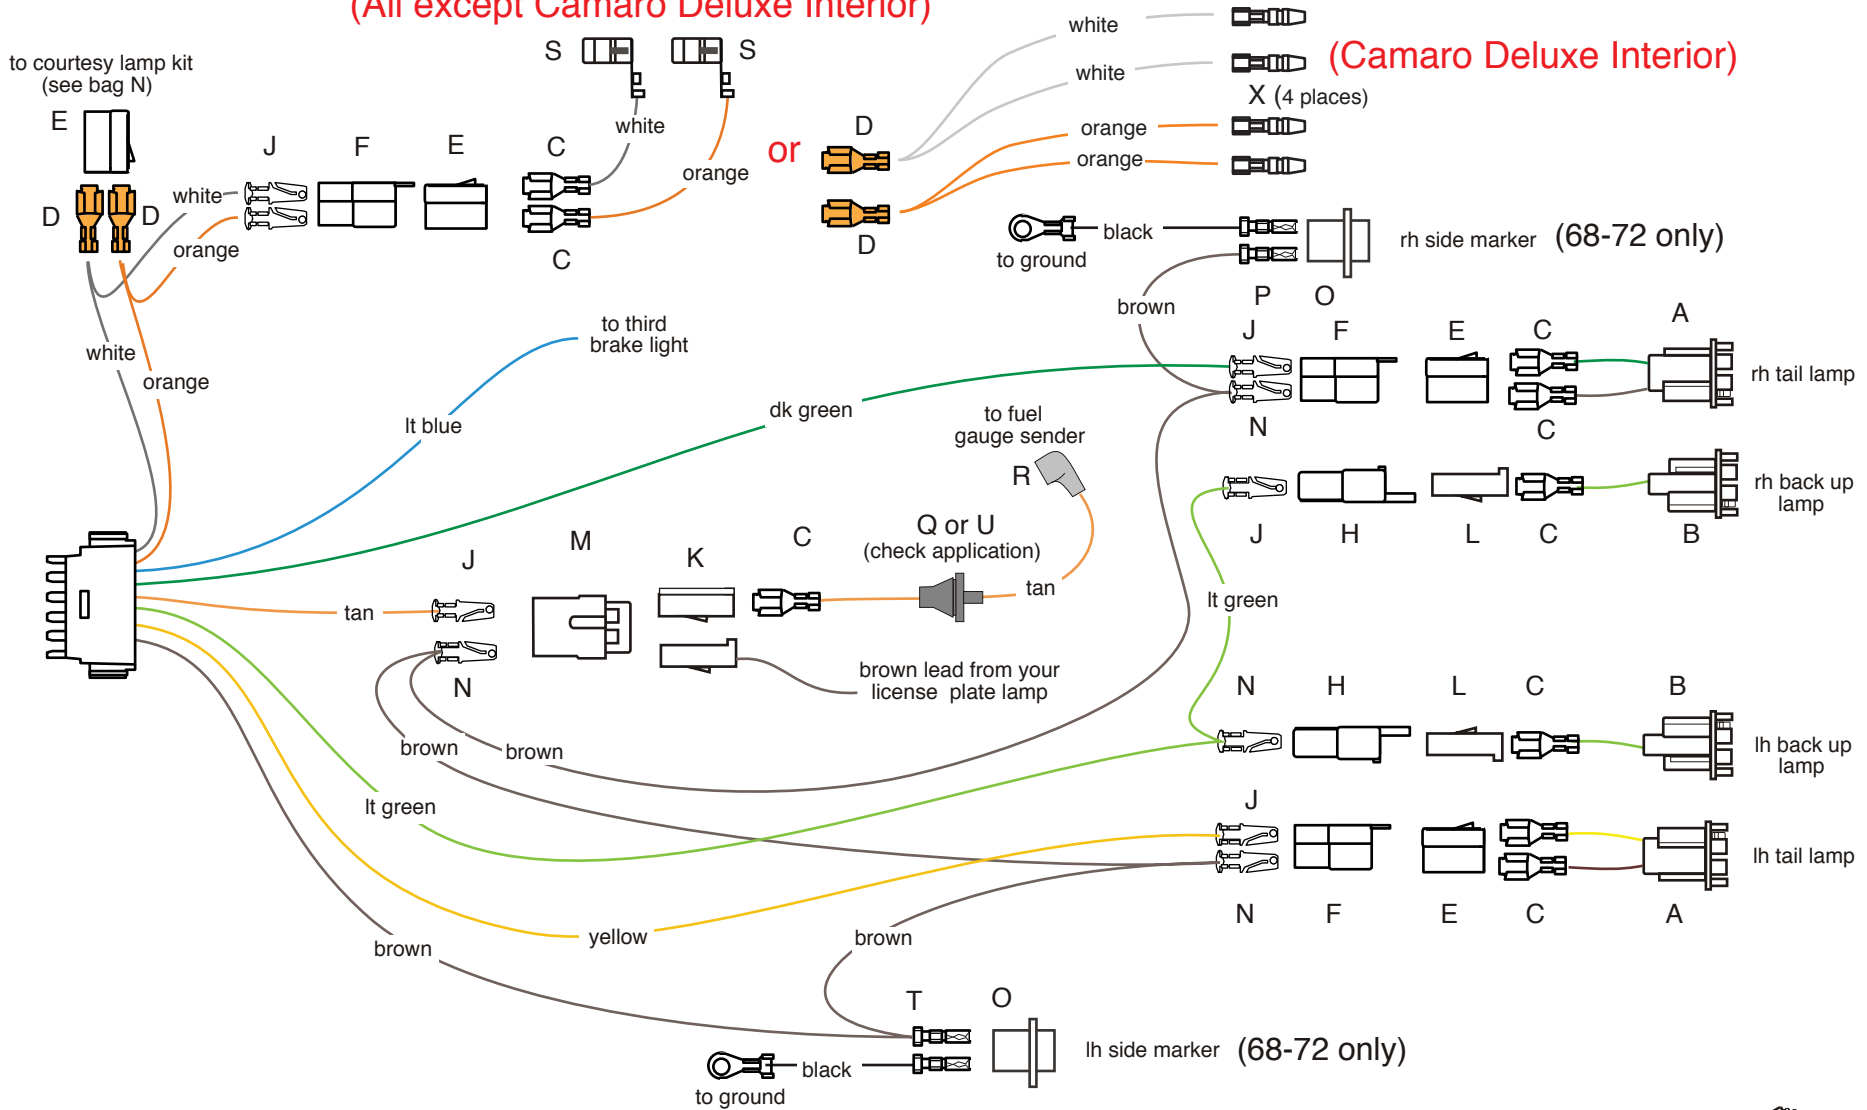

Use the loose piece dk blue wire (power lead) if you are using electric fuel pump.



Plug this terminal into the 6 way power feed connector, located on the dash harness.

USE THIS SHEET FOR A
67-68 CAMARO NON-RALLY SPORT CAR
 OR **69-72 NOVA**



www.americanautowire.com 856-933-0801

Classic Update Series





















bag **M**

REAR BODY KIT









500673

92965933 instruction rev 3.0 7/11/2013


USE THIS SHEET FOR A **NON-RALLY SPORT CAMARO OR NOVA**

A			Connect the main connector to the mating connector on the dash harness 500662 bag G. Route this harness along door sill and into the trunk.
B		LIGHT BLUE	Third brake light
		TAN	Fuel signal
		TAN	Fuel Tank lead (with rubber end)
C			Plug the rubber end of this wire R onto the sending unit on fuel tank. Route the wire to the stock feed thru hole under fuel tank filler and install rubber grommet Q for a Camaro or U for a Nova in the direction shown on sheet 1. Secure this wire into hole with the attached grommet. In the trunk area, trim this wire to reach connector M from wire above. Attach terminal C and plug into connector K. Plug connector K into mating connector M. This should match the tan wire from above. Your existing license plate lamp wire will also plug into connector M. (Note: Terminal C and connector L are provided if you need to attach to your lamp wire.)
D			
E		BROWN	Parking lamps
F			Route this wire to the left side marker and trim to length. Double this wire with the cut off portion, install terminal T and plug into lamp socket O. Route the loose end to the LH tail lamp, cut to length, double this wire with the cut off portion, install terminal N, and plug this terminal into connector F in the location shown on sheet 1. Route the loose end to connector M (from the tan wire above), and cut to length. Double this wire with the cut off portion, install terminal N and plug this terminal into connector M, in location shown on sheet 1. Route the loose end to the RH Tail lamp and cut to length. Double this wire with the cut off portion, install terminal N and plug this terminal into connector F, in the location shown on sheet 1. Route the loose end to the right side marker, trim to length, install terminal P, and plug into lamp socket O.
H		BLACK	Side Marker Ground
J		YELLOW	LH Stop / Tail
K		DK GREEN	RH Stop / Tail
L		LIGHT GREEN	Back up lamp feed
M		WHITE	Courtesy ground
N			At the driver's side kick panel area, cut this wire, double it with the cut off portion using terminal D, and plug into connector E maintaining color continuity with the mating connector in the courtesy lamp kit (bag N). If you are using a dome lamp, route the loose end of this wire to the rear pillar area of the trunk, install terminal J and connector F. (Note: a factory dome lamp harness will also plug into this connector if you are not replacing the headliner at this time.) For a roof mounted single dome lamp, install the loose white wire S (supplied with terminal installed) into the dome lamp. Route this wire to connector F (on orange wire) location and trim to length. Install terminal C and connector E, maintaining color continuity with the white wire in connector F. If you are using dual sail panel dome lamps on a Camaro with Deluxe Interior, we have included a long loose white wire in this kit. Install terminal V onto one end of that wire, plug that terminal into one of the dual sail panel lamps and route that wire to connector F (on white wire) location and trim to length. Install terminal V onto the remainder of the cut off portion of the white wire, plug that terminal into the other dual sail panel lamp and route that wire to connector F (on white wire) location and trim to length. Double these wires together using terminal D and plug into connector E maintaining color continuity with connector F at the rear pillar area. Plug connector E into connector F to complete the dome lamp circuit.
O			
P		ORANGE	Courtesy Lamp
Q	 (larger dia)		At the driver's side kick panel area, cut this wire, double it with the cut off portion using terminal D, and plug into connector E maintaining color continuity with the mating connector in the courtesy lamp kit (bag N). If you are using a dome lamp, route the loose end of this wire to the rear pillar area of the trunk, install terminal J and connector F. (Note: a factory dome lamp harness will also plug into this connector if you are not replacing the headliner at this time.) For a roof mounted single dome lamp, install the loose orange wire S (supplied with terminal installed) into the dome lamp. Route this wire to connector F (on orange wire) location and trim to length. Install terminal C and connector E, maintaining color continuity with the orange wire in connector F. If you are using dual sail panel dome lamps on a Camaro with Deluxe Interior, we have included a long loose orange wire in this kit. Install terminal X onto one end of that wire, plug that terminal into one of the dual sail panel lamps and route that wire to connector F (on orange wire) location and trim to length. Install terminal X onto the remainder of the cut off portion of the orange wire, plug that terminal into the other dual sail panel lamp and route that wire to connector F (on orange wire) location and trim to length. Double these wires together using terminal D and plug into connector E maintaining color continuity with connector F at the rear pillar area. Plug connector E into connector F to complete the dome lamp circuit.
R			
S			
T			
U	 (smaller dia)	DK BLUE	Fuel Pump
X			This wire can be used if you are using an electric fuel pump. Plug the terminated end into the 6 way power disconnect on the dash harness, maintaining color continuity with the dk blue wire in the mating connector. Route the other end to a fuel pump relay (not included in this kit, but available from American Autowire).

USE THIS SHEET FOR A CAMARO RALLY SPORT CAR

A		CONNECT THE MAIN CONNECTOR TO THE MATING CONNECTOR ON THE DASH HARNESS 500662 BAG G. ROUTE THIS HARNESS ALONG DOOR SILL AND INTO THE TRUNK.	
	LIGHT BLUE TAN	Third brake light Fuel signal	Connect to the third brake lamp, if equipped. Route this wire to the rear panel of the trunk (near fuel tank filler) and trim to length. Install terminal J and plug into connector M, as shown on sheet 5.
B			
	TAN	Fuel Tank lead (with rubber end)	Plug the rubber end of this wire R onto the sending unit on fuel tank. Route the wire to the stock feed thru hole under fuel tank filler and install rubber grommet Q in direction shown on sheet 5. Secure this wire into hole with the attached grommet. In the trunk area, trim this wire to reach connector M from wire above. Attach terminal C and plug into connector K. Plug connector K into mating connector M. This should match the tan wire from above. Your existing license plate lamp wire will also plug into connector M. (Note: Terminal C and connector L are provided if you need to attach to your lamp wire.)
C			
D		BROWN	Parking lamps
E			
F			
H		BLACK	Side Marker Ground
J		YELLOW	LH Stop / Tail
K		DK GREEN	RH Stop / Tail
L		LIGHT GREEN	Back up lamp feed
M		WHITE	Courtesy ground
N			
O			
P			
Q		ORANGE	Courtesy Lamp
R			
S			
T			
X		DK BLUE	Fuel Pump

Classic Update Series

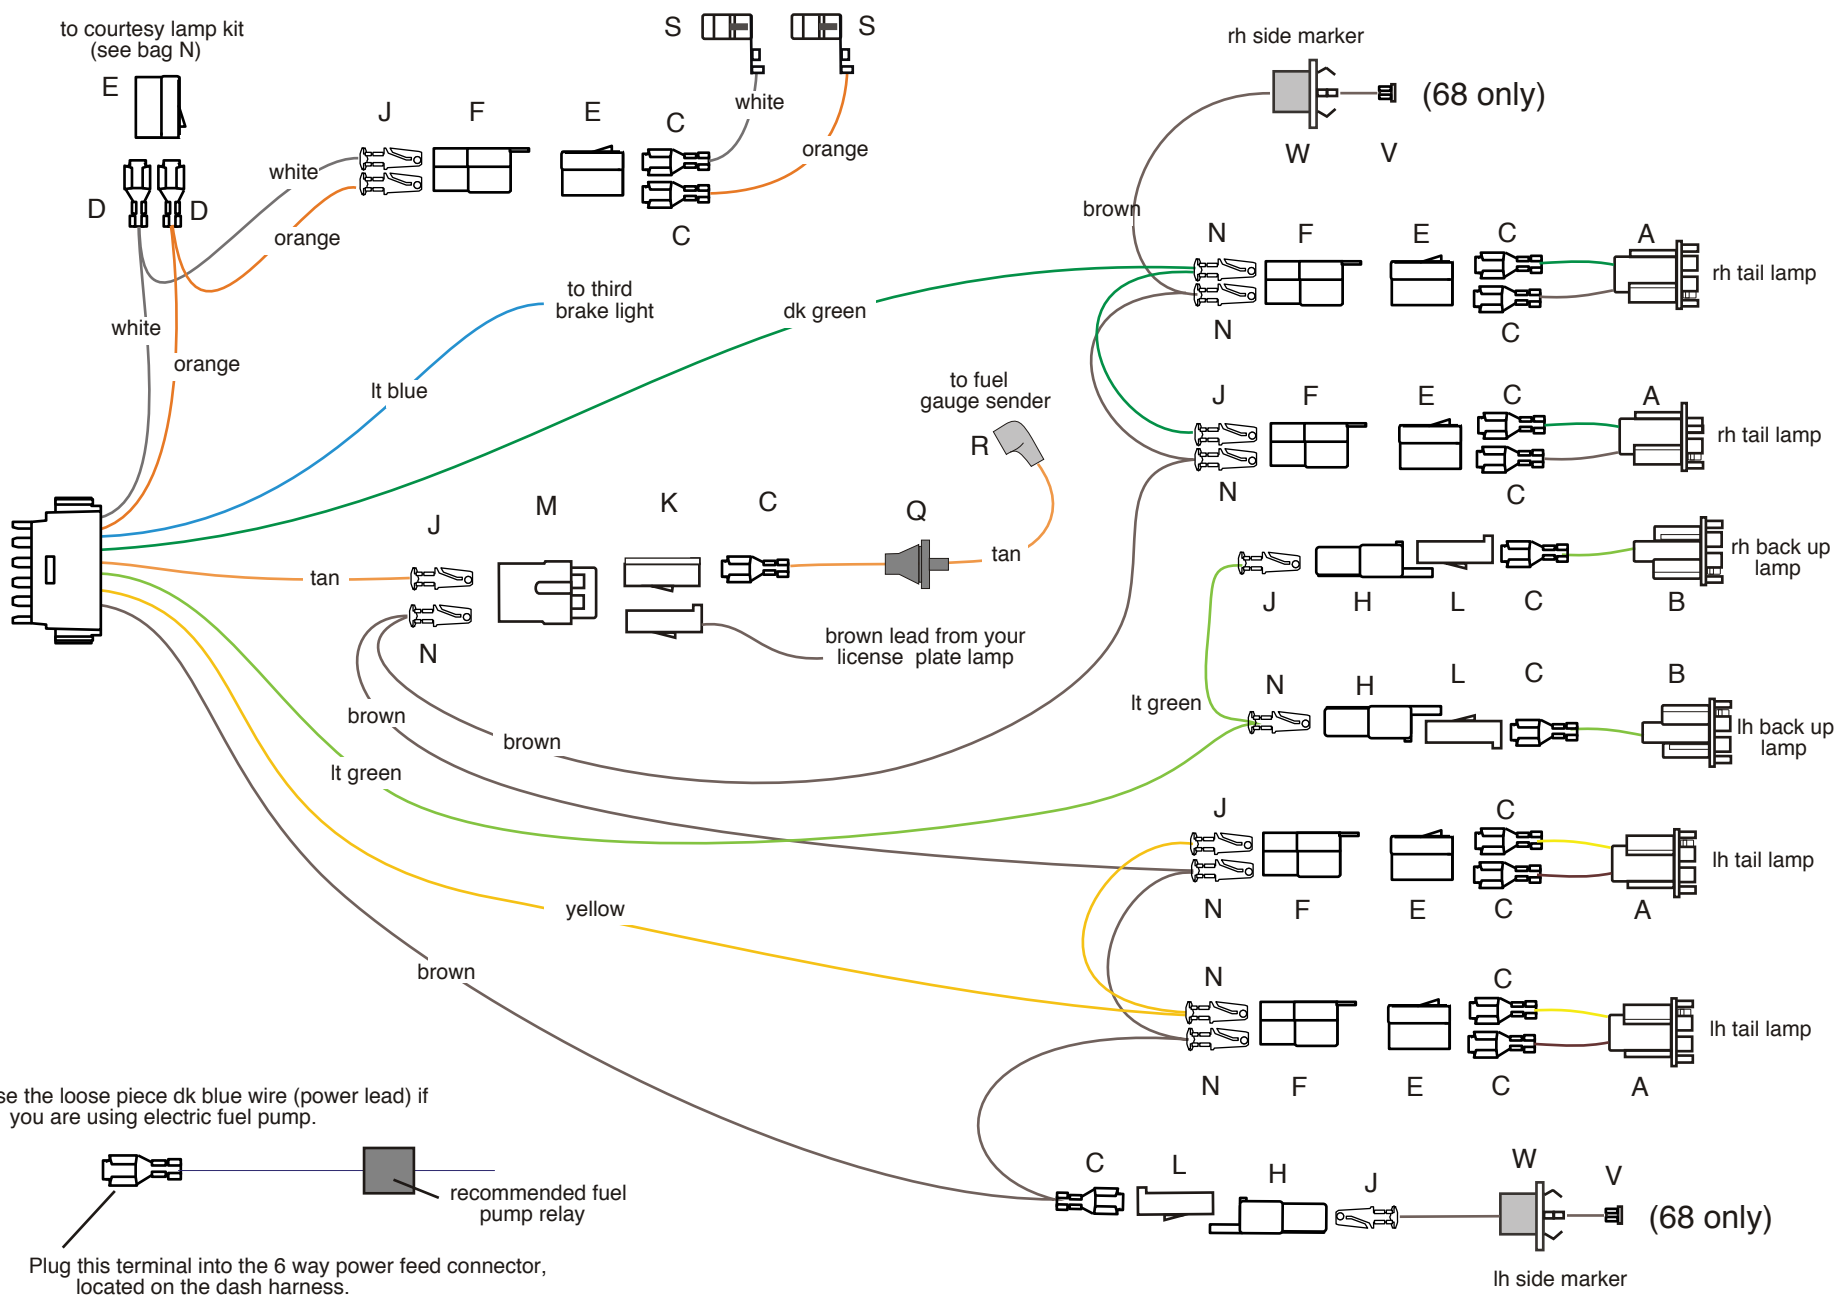

USE THIS SHEET FOR A 67-68 FIREBIRD

REAR BODY KIT
500673
 92965933 instruction rev 3.0 7/11/2013

USE THIS SHEET FOR A 67-68 FIREBIRD

A			Connect the main connector to the mating connector on the dash harness 500662 bag G. Route this harness along door sill and into the trunk.
B		LIGHT BLUE TAN	Third brake light Fuel signal Connect to the third brake lamp, if equipped. Route this wire to the rear panel of the trunk (near fuel tank filler) and trim to length. Install terminal J and plug into connector M, as shown on sheet 5.
C		TAN	Fuel Tank lead (with rubber end) Plug the rubber end of this wire R onto the sending unit on fuel tank. Route the wire to the stock feed thru hole under fuel tank filler and install rubber grommet Q in direction shown on sheet 5. Secure this wire into hole with the attached grommet. In the trunk area, trim this wire to reach connector M from wire above. Attach terminal C and plug into connector K. Plug connector K into mating connector M. This should match the tan wire from above.
D			Your existing license plate lamp wire will also plug into connector M. (Note: Terminal C and connector L are provided if you need to attach to your lamp wire.)
E		BROWN	Parking lamps Route this wire to the left side marker and trim to length. Double this wire with the cut off portion and install terminal D and plug into connector K. Cut a 3 jumper wire & install terminal J and plug into connector L. Install the loose end of the jumper wire through light socket W and install terminal V. Route the loose end to the RH tail lamp. Cut to length, and double this wire with the cut off portion, using terminal N. Plug this terminal into connector F, in location shown on sheet 5. Route the loose end to the other LH tail lamp and repeat.
F			Route the loose end to connector M (from the tan wire above), and cut to length. Double this wire with the cut off portion and install terminal N. Plug this terminal into connector M, in location shown on sheet 5. Route the loose end to the RH tail lamps and repeat the procedure.
H		YELLOW	LH Stop / Tail Route this wire to the LH tail lamp and cut to length. Double this wire with the cut off portion and install terminal N. Plug this wire into connector F from above. Route the loose end to the other LH tail lamp and cut to length. Install terminal J and plug into connector F, as shown on sheet 5. Install terminals C and connector E on the tail lamp pigtails A, maintaining color continuity with connector F. Plug connectors E into connectors F.
J			Route this wire to the RH tail lamp and cut to length. Double this wire with the cut off portion and install terminal N. Plug this wire into connector F from above. Route the loose end to the other RH tail lamp and cut to length. Install terminal J and plug into connector F, as shown on sheet 5. Install terminals C and connector E on the tail lamp pigtails A, maintaining color continuity with connector F. Plug connectors E into connectors F.
K		DK GREEN	RH Stop / Tail Route this wire to the LH back up lamp and trim to length. Double this wire with the cut off portion and install terminal N and connector H. Plug connector H into your Rally Sport back up lamp assembly. Route the loose end of the lt green wire to the right side back up lamp. Install terminal J and connector H. Plug connector H into your Rally Sport back up lamp assembly.
L		LIGHT GREEN	Back up lamp feed
M		WHITE	Courtesy ground At the driver's side kick panel area, cut this wire and double it with the cut off portion using terminal D, and plug into connector E maintaining color continuity with the mating connector in the courtesy lamp kit (bag N).
N			If you are using a dome lamp, route the loose end of this wire to the rear pillar area of the trunk, and install terminal J and connector F. Plug into connector F in location shown on sheet 5. (Note: a factory dome lamp harness will also plug into this connector, if you are not replacing the headliner at this time.) Install the loose white wire S (supplied with terminal installed) into the dome lamp. Route this wire to connector F (on white wire) location and trim to length. Install terminal C and connector E, maintaining color continuity with the white wire in connector F.
P			At the driver's side kick panel area, cut this wire and double it with the cut off portion using terminal D, and plug into connector E maintaining color continuity with the mating connector in the courtesy lamp kit (bag N).
Q		ORANGE	Courtesy Lamp If you are using a dome lamp, route the loose end of this wire to the rear pillar area of the trunk, and install terminal J and connector F. Plug into connector F in location shown on sheet 5. (Note: a factory dome lamp harness will also plug into this connector, if you are not replacing the headliner at this time.) Install the loose orange wire S (supplied with terminal installed) into the dome lamp. Route this wire to connector F (on orange wire) location and trim to length. Install terminal C and connector E, maintaining color continuity with the orange wire in connector F.
R		DK BLUE	Fuel Pump This wire can be used if you are using an electric fuel pump. Plug the terminated end into the 6 way power disconnect on the dash harness, maintaining color continuity with the dk blue wire in the mating connector. Route the other end to a fuel pump relay (not included in this kit, but available from American Autowire).
S			
V			
W			