


# Classic Update Series

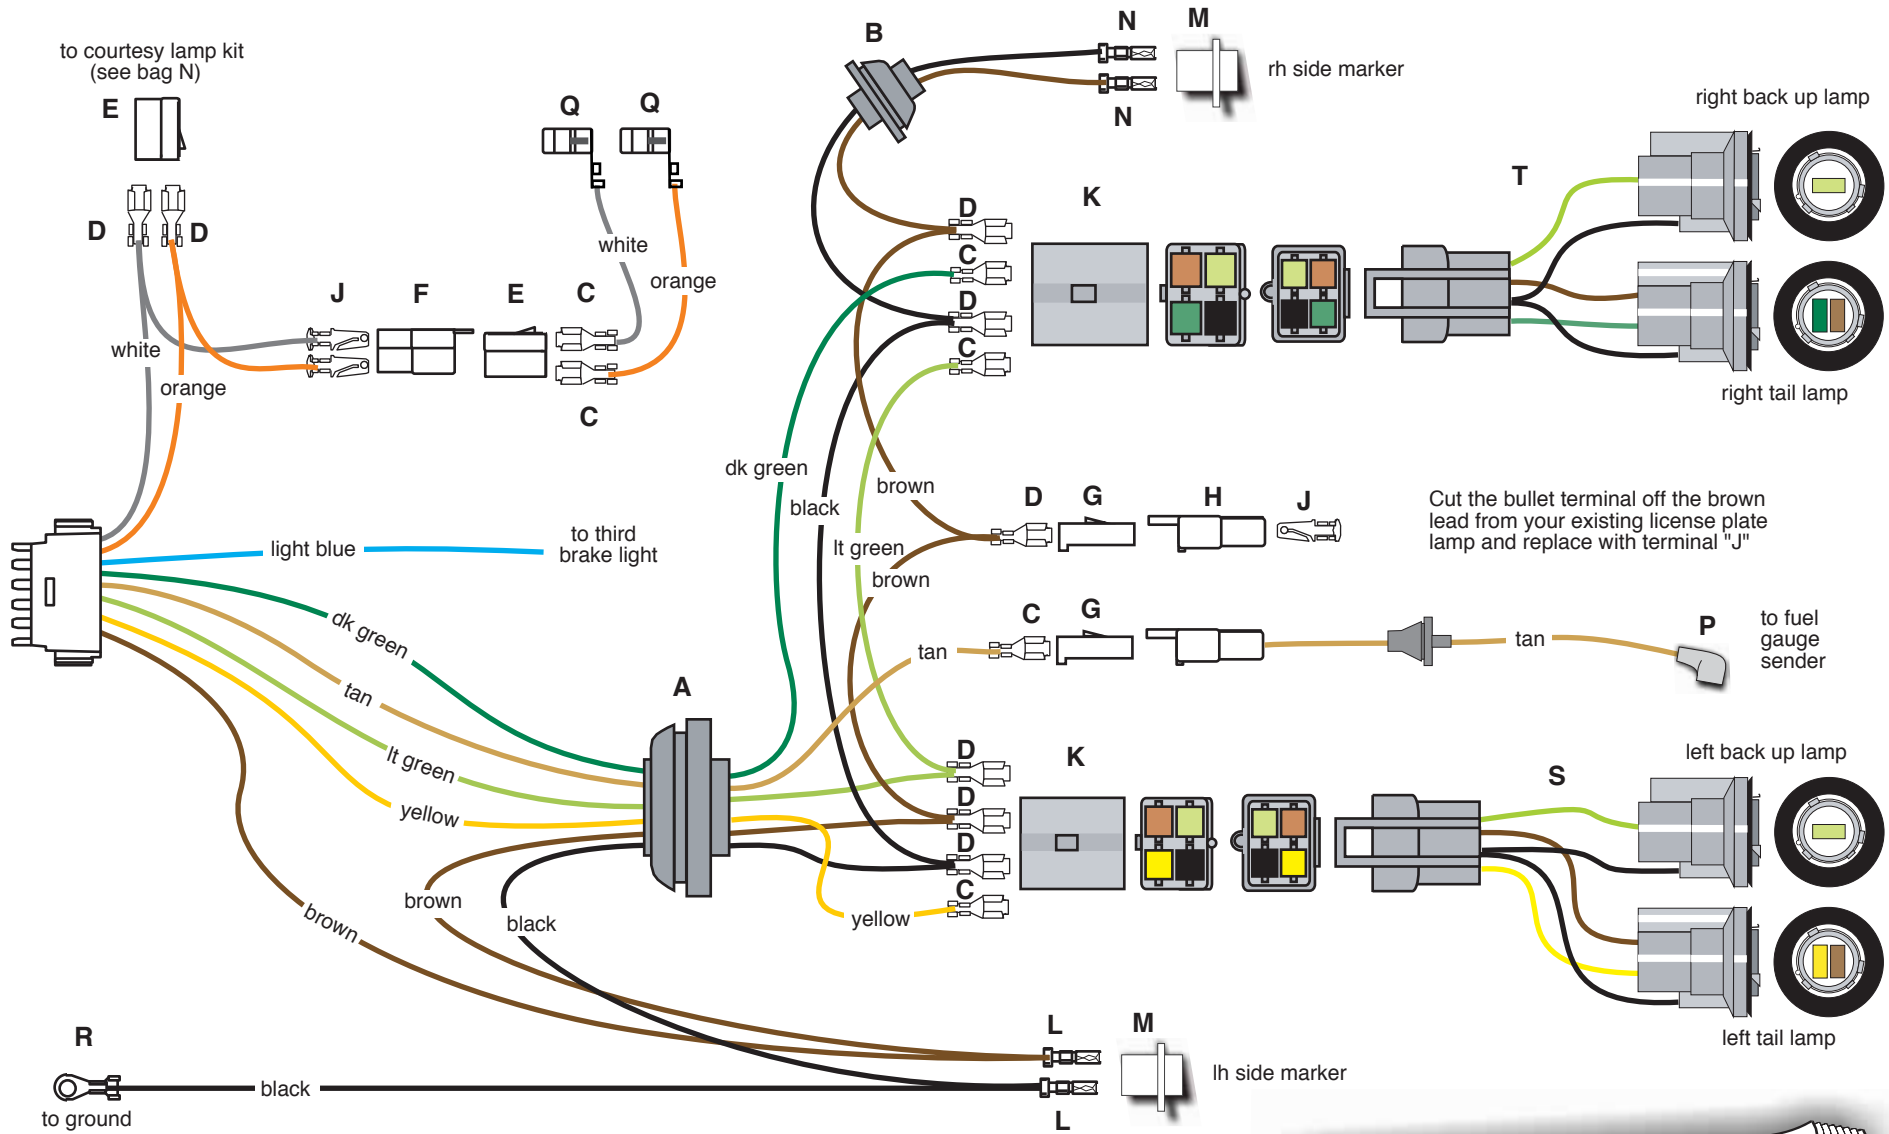

**American  
Autowire**

American Autowire  
800-482-9473

Classic Update Series  
1970-72 Chevelle


bag **M**

REAR BODY KIT

**510111**

92969181 instruction rev 1.0 4/10/2013


## USE THIS SHEET FOR ALL 1970-72 CHEVELLES



A

Connect the main connector to the mating connector on the dash harness 510107 (Bag G). Route this harness along the door sill threshold cavity to the rear of the car.

NOTE: Before starting, install grommets A (larger) and B (smaller) into the rear quarter panels in the same direction as shown on sheet 1. You have been provided with 2 tail lamp pigtails "S" (LH with yellow wire), and "T" (RH with dk. green wire). These will plug into the RB connection as shown on sheet 1.



B

LIGHT BLUE THIRD BRAKE LIGHT Connect to the third brake lamp, if equipped.



C

TAN GAS GAUGE Route this wire through grommet A to the fuel tank area, cut to length, install terminal C and plug into connector G as shown on Page 1.



D

TAN Fuel tank lead (with rubber end) Plug the rubber end of this wire R onto the sending unit on fuel tank. Route the wire to the stock feed thru hole in trunk floor, pull the assembly up through the floor, and plug into connector G as shown on Page 1.



E



F

BROWN PARKING LAMPS Route this wire to the left side marker lamp and trim to length. Double this wire with the cut off portion, install terminal L, and plug into lamp socket M. Route the loose end through grommet A to the LH tail lamp connection and trim to length. Double this wire with the cut off portion, install terminal D, and plug into connector K in the exact location as shown on Sheet 1. Route the loose end to the tag lamp, and trim to length. Double this wire with the cut off portion, install terminal D, and plug into connector G as shown on Sheet 1.



G




H

NOTE: Your existing license plate lamp wire will plug into connector G as shown on sheet 1 (terminal J and connector H have been provided for you to make this connection). Route the loose end to the RH tail lamp connection and trim to length. Double this wire with the cut off portion, install terminal D, and plug into connector K in the exact location as shown on Sheet 1. Route the loose end through grommet B to the RH side marker, trim to length, install terminal N and plug into lamp socket M as shown on sheet 1.



J



K



L

BLACK GROUND Attach ring terminal on wire R to a good chassis ground, route the loose end to the left side marker lamp and trim to length. Double this wire with the cut off portion, install terminal L, and plug into lamp socket M. Route the loose end through grommet A to the LH tail lamp connection and trim to length. Double this wire with the cut off portion, install terminal D, and plug into connector K in the exact location as shown on Sheet 1. Route the loose end to the RH tail lamp connection and trim to length. Double this wire with the cut off portion, install terminal D, and plug into connector K in the exact location as shown on Sheet 1. Route the loose end through grommet B to the RH side marker, trim to length, install terminal N and plug into lamp socket M as shown on sheet 1.



M



N



P


YELLOW LH STOP / TAIL Route this wire through grommet A to the LH tail lamp, cut to length, install terminal C, and plug this wire into connector K in the exact location as shown on Sheet 1.



Q



R

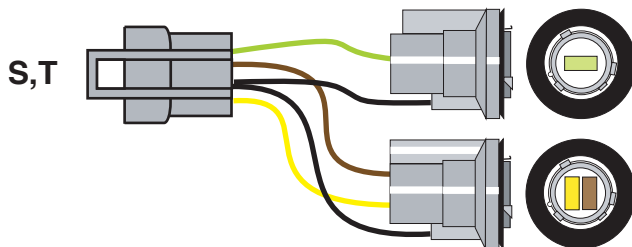

# Classic Update Series

