




**American  
Autowire**

We Make Wiring Easy!!

150 Heller Pl #17 W Bellmawr, NJ 08031 856-933-0801

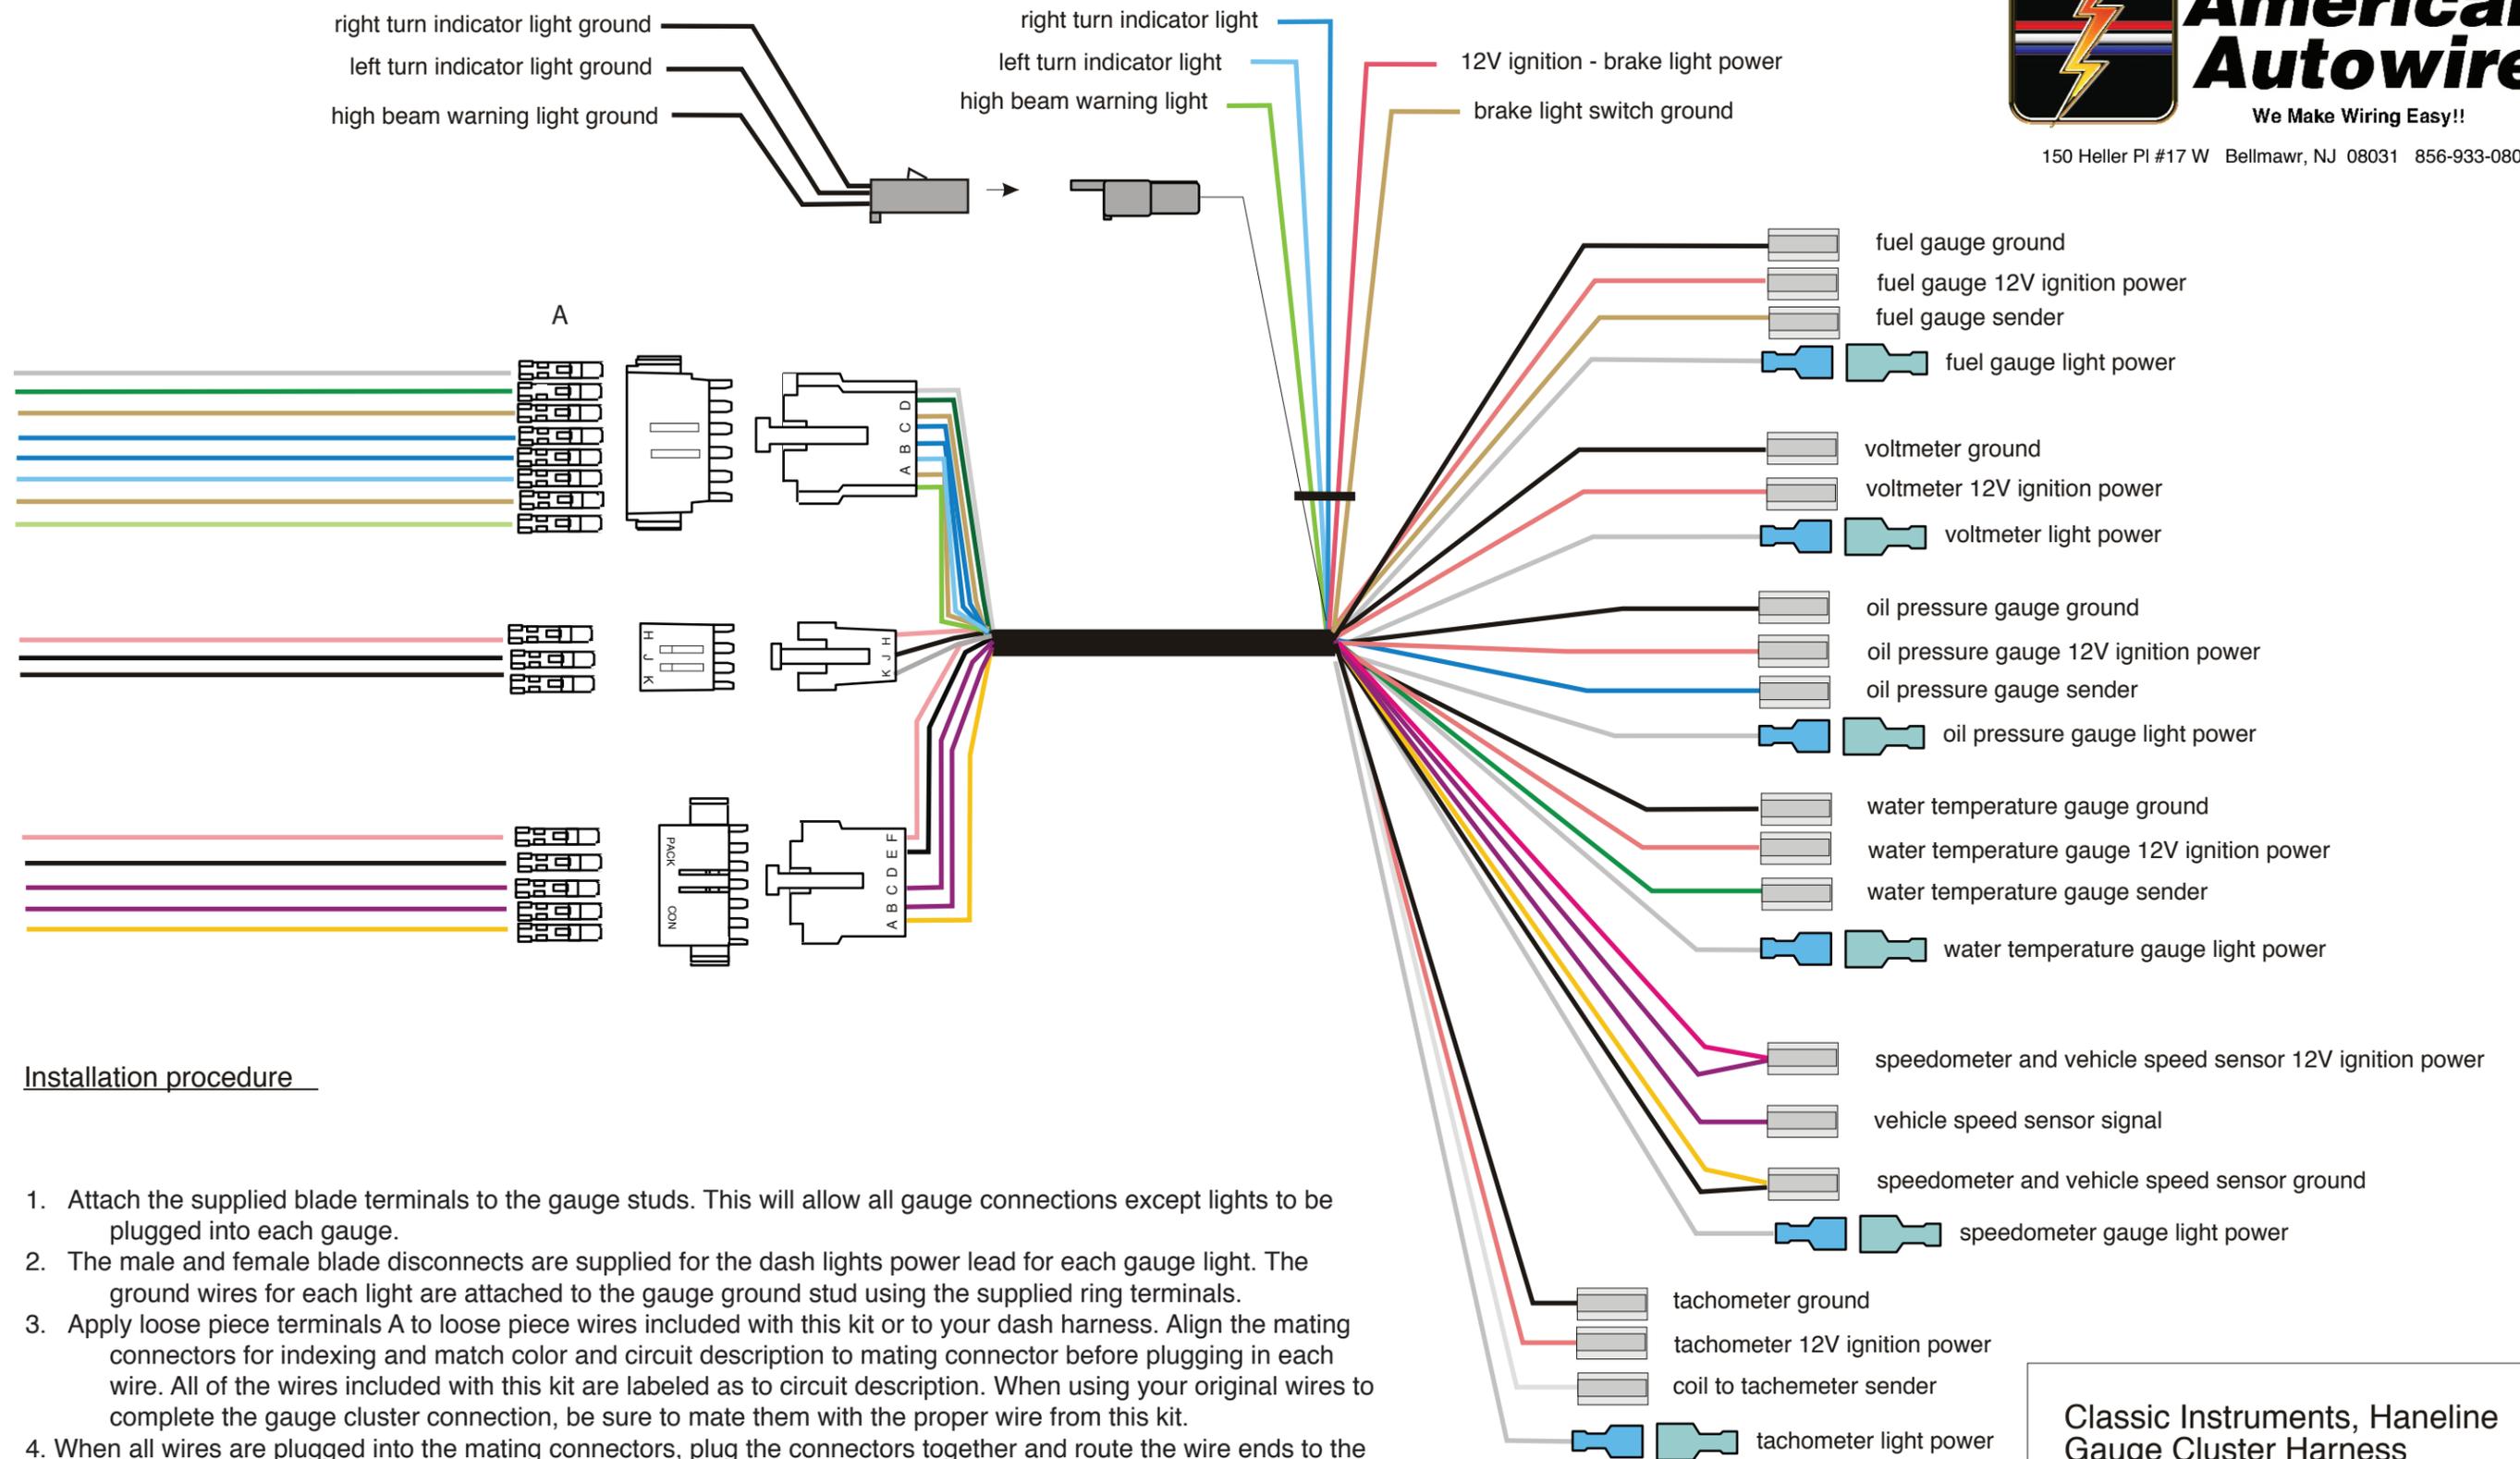

Installation procedure

1. Attach the supplied blade terminals to the gauge studs. This will allow all gauge connections except lights to be plugged into each gauge.
2. The male and female blade disconnects are supplied for the dash lights power lead for each gauge light. The ground wires for each light are attached to the gauge ground stud using the supplied ring terminals.
3. Apply loose piece terminals A to loose piece wires included with this kit or to your dash harness. Align the mating connectors for indexing and match color and circuit description to mating connector before plugging in each wire. All of the wires included with this kit are labeled as to circuit description. When using your original wires to complete the gauge cluster connection, be sure to mate them with the proper wire from this kit.
4. When all wires are plugged into the mating connectors, plug the connectors together and route the wire ends to the appropriate sender, power source, or ground.

Classic Instruments, Haneline  
Gauge Cluster Harness

**510150**

92969282 rev 0.0 12/2/2009