


1967 - 1972 Ford Truck Fuse Panel Mounting Instructions

Stock Lower Fusebox
Mounting Hole

New AAW Fusebox
1/8" Mounting Hole

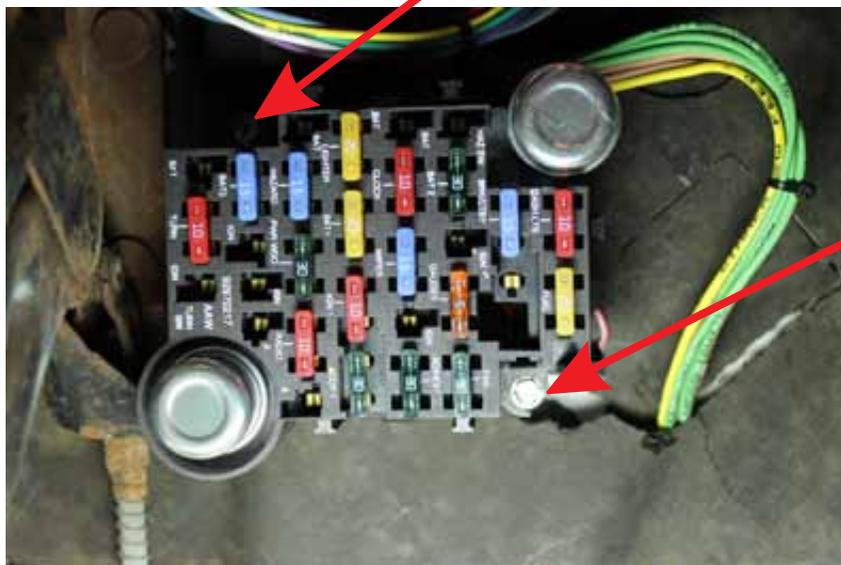

NEW AAW application

Original application



As Viewed From Under the Dash



NOTE:

1. The installation and placement of your new AAW fusebox is very easy and straightforward. On this page to the upper right, you will find a photograph of the stock firewall with the original fusebox removed exposing the lower mounting hole as it was used to mount the original fusebox (the original upper hole is not in the photo). You will utilize this stock lower mounting hole and will have to drill one new mounting hole. Using the new AAW fusebox as your guide, and the one original mounting hole as shown above in the upper LH photograph, attach the fusebox to the firewall using one of the two mounting screws (found in the 510369 loose piece dash kit) that have been provided for you. Using a long pick, pencil, (or whatever you choose), mark the place for you to drill the new 1/8" hole in your firewall (**it will be necessary for you to remove a small portion of your firewall pad exposing the metal portion where you will mark and drill your firewall**) by inserting the pick or pencil into the other mounting hole on the fusebox and leaving a mark on the firewall. Once you have made your mark, remove the fusebox from the firewall and drill your new hole. Now, re-install your fusebox to the firewall in the original hole as well as your new 1/8" hole, using the two provided mounting screws.

2. Be sure to check for clearances of any accessories that you might be adding. The stock clutch and brake pedal assembly pose no concerns at all when mounted in this location.

3. Your new AAW dash/main harness is designed to route exactly the same way as your original dash harness did. Once the fusebox has been attached to the firewall of the truck, the harness routes up and over top of the pedal carriage assembly and snaps into the two retaining clips (in behind the speedometer assembly), then through the upper dash harness guide area above the radio, and over to the heater box and RH door jamb areas. Please take time to keep it away from any moving items.



**American
Autowire**

www.americanautowire.com 856-933-0801

92970388

92970388 instructions Rev 0.0 6/18/2013