



**1960-63 Falcon  
& 1960-63, 1965  
Comet ONLY!**

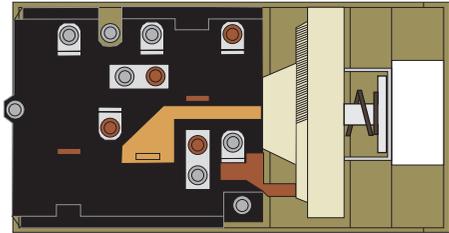

**New AAW switch assembly**

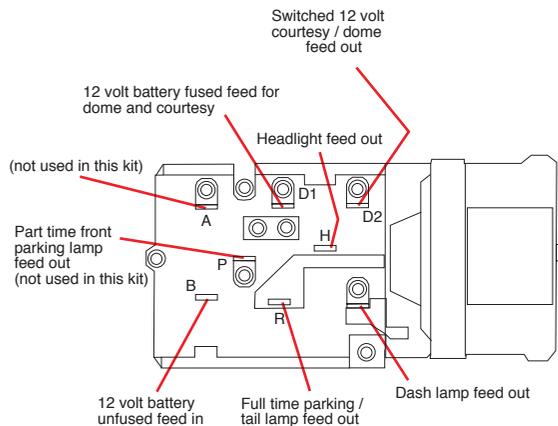

**Original dash spacer**  
(Not Included with this kit)

**Original dash facing**

File shaft approximately as shown for proper fit on knob

end view

**Original dash bezel and nut**  
(Not Included with this kit)

**NOTE 1:** If you are using this new AAW switch in a 1960 - 63 Falcon or a 1960-63 or 65 Comet, see page 1 of this instruction set. The switch installs with the connector area turned out to the LH driver's side as shown on page 1.

**NOTE 2:** If you are using this new AAW switch in a 1964 Falcon or Comet, see page 2 of this instruction set. The switch installs with the connector area turned down toward the floor of the car as shown on page 2.

1. Install the new switch into your dash using the original bezel and nut. It will be necessary to cut the shaft for a nice custom installation.
2. Install the shaft into the switch being certain that it is fully engaged inside the switch. Once the shaft is fully seated down inside the switch in the "off" position, place the knob on end of shaft. Measure how far away from the dash the bottom face of the knob (closest to dash) is. Allow for 1/4" or so extra so that the knob will not bottom out on dash once the shaft has been cut to length.
3. Remove the shaft from the switch. To do this, pull the shaft completely out to the "headlight on" position. Reach up under the dash and depress the button on top of the switch and pull the shaft out of the switch. Cut the shaft based on your measurements. It may be necessary to file the end of the shaft once it has been cut in order to reinstall the knob onto the shaft.
4. Attach the knob to the cut shaft and tighten the allen screw.
5. Reinstall your newly customized shaft into your headlight switch assembly.



**American  
Autowire**

www.americanautowire.com 856-933-0801

PART #


**510385**

DESCRIPTION:

**Headlight Switch Kit  
60-64 Falcon & 60-65 Comet  
Classic Update Series**

92970577 instruction sheet rev 0.0 8/6/2013

**New AAW switch assembly**

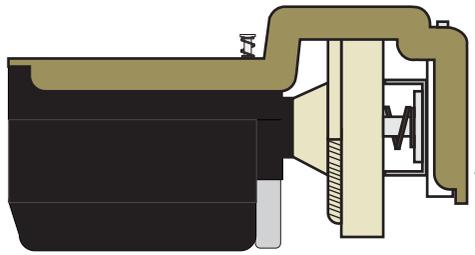


**1964 Falcon & Comet ONLY!**


**Original dash bracket**  
(Not Included with this kit)

**Original dash facing**

**Original dash bezel and nut**  
(Not Included with this kit)

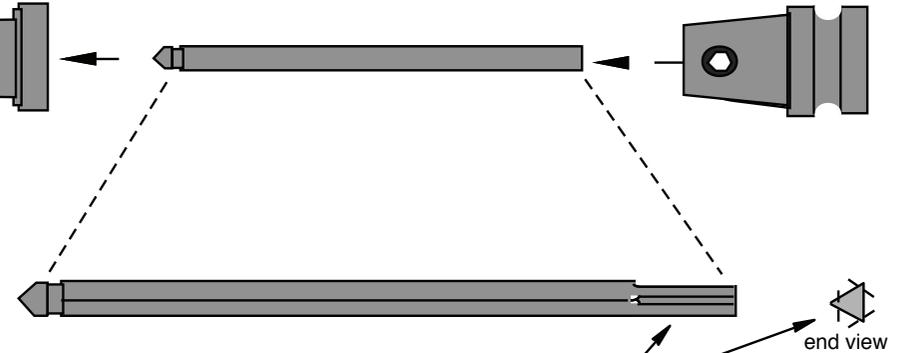


File shaft approximately as shown for proper fit on knob

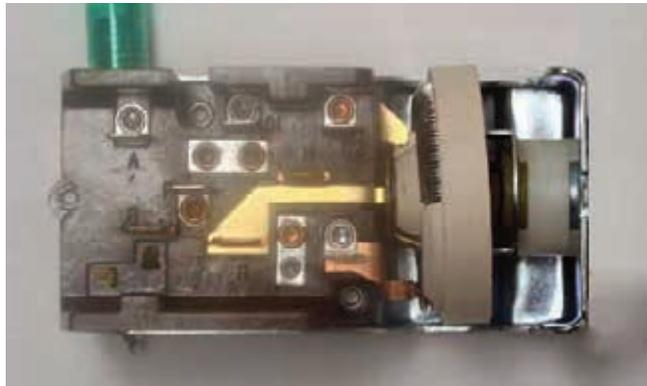

**NOTE 1:** If you are using this new AAW switch in a 1960 - 63 Falcon or a 1960-63 or 65 Comet, see page 1 of this instruction set. The switch installs with the connector area turned out to the LH driver's side as shown on page 1.

**NOTE 2:** If you are using this new AAW switch in a 1964 Falcon or Comet, see page 2 of this instruction set. The switch installs with the connector area turned down toward the floor of the car as shown on page 2.

1. Install the new switch into your dash using the original bezel and nut. It will be necessary to cut the shaft for a nice custom installation.
2. Install the shaft into the switch being certain that it is fully engaged inside the switch. Once the shaft is fully seated down inside the switch in the "off" position, place the knob on end of shaft. Measure how far away from the dash the bottom face of the knob (closest to dash) is. Allow for 1/4" or so extra so that the knob will not bottom out on dash once the shaft has been cut to length.
3. Remove the shaft from the switch. To do this, pull the shaft completely out to the "headlight on" position. Reach up under the dash and depress the button on top of the switch and pull the shaft out of the switch. Cut the shaft based on your measurements. It may be necessary to file the end of the shaft once it has been cut in order to reinstall the knob onto the shaft.
4. Attach the knob to the cut shaft and tighten the allen screw.
5. Reinstall your newly customized shaft into your headlight switch assembly.

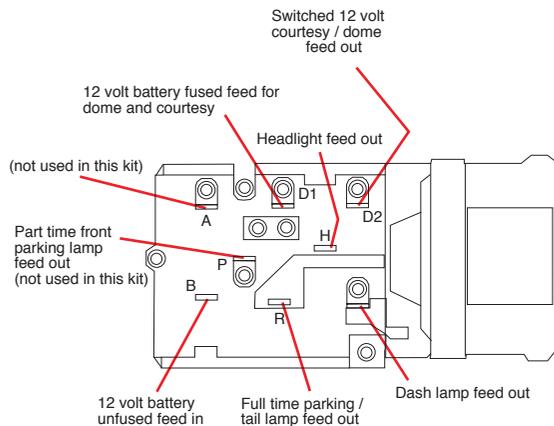

**American  
Autowire**

www.americanautowire.com 856-933-0801

PART #

**510385**

DESCRIPTION:

**Headlight Switch Kit**  
**'60-'64 Falcon & '60-'65 Comet**  
**Classic Update Series**

92970577 instruction sheet rev 0.0 8/6/2013